



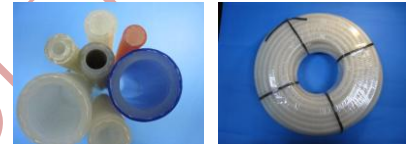

### DICHEN platinum-cured Silicone Braided Hose

•Key future :

- High pressure, burst pressure of the maximum working pressure of 2 to 4 times.
- Retains Flexibility in Low and High Temperatures
- High temperature, -40 ° C ~ +180 ° C, instantly available to 225 degrees.
- Low volatility for pharmaceutical and biomedical applications.
- Chemical inert 、Resistant to ozone 、UV 、 anti-aging, resistant to moisture.
- Imparts no taste or odor to critical streams
- Biocompatibility meet ISO 10993-1

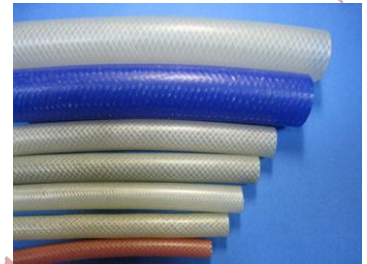

•Typical Application

- Oxygen, power pump tube, high-pressure pneumatic tools.
- Food equipment delivery line (beverages, dairy products, fermented line, bottle filling, mixing container)
- Hot water transport (shower pipeline)
- Laboratory pipeline (Deionized water transfer, viscous material handling, sterile liquids, cell culture, bioreactors )

stock#	P/N	I.D.			O.D./mm	wall Thickness	kg /meter
		(mm)	±Tol.(mm)	(inch)			
2020001	BC-212S-0314-7	3.14	0.2	1/8	11.00	3.93	0.109
2020002	BC-212S-0480-7	4.80	0.2	3/16	12.00	3.60	0.119
2020003	BC-212S-0640-7	6.40	0.3	1/4	13.50	3.55	0.139
2020004	BC-212S-0709-7	7.90	0.3	5/16	15.00	3.55	0.160
2020005	BC-212S-0950-7	9.50	0.3	3/8	16.60	3.55	0.182
2020006	BC-212S-1100-7	11.00	0.3	7/16	19.00	4.00	0.236
2020007	BC-212S-1270-7	12.70	0.3	1/2	21.00	4.15	0.274
2020008	BC-212S-1600-7	16.00	0.3	5/8	24.00	4.00	0.314
2020009	BC-212S-1900-7	19.00	0.4	3/4	27.00	4.00	0.361
2020010	BC-212S-2200-7	22.00	0.4	7/8	30.00	4.00	0.408
2020011	BC-212S-2540-7	25.40	0.5	1	33.40	4.00	0.462

- Hardness is 70 shore A, color is transparent.. We welcome any customized sizes and hardness.
- 1. 7m/pk(=25feet/pk), 15m/pk(50feet/pk), 30m/pk(100 feet/pk)