

EZ-IP505050IR500ME(Y)(A)

H.265 5.0MP MOTORIZED 5-50MM IR BULLET IP CAMERA

FEATURES


- ONVIF 2.6 (H.264)
- PoE (Power over Ethernet)
- **Built-in 5-50mm Motorized Lens**
- **Intelligent Analysis:**
Cross Counting, Perimeter Intrusion Detection, Line Cross Detection, Stationary Object Detection, Pedestrian Detection
- ROI (Region of Interest): Record Areas Where Matter Most
- Built-in 4pcs High Power IR Array/ 80M IR Distance
- Scheduling Record to SD Card (up to 128GB)
- Audio I/ O, Alarm I/O, BNC Output, Reset Button



SPECIFICATION

MODEL	EZ-IP505050IR500ME(Y)(A)
Video Compression	H.265 / H.264
Image Sensor	1/2.7" High Image CMOS Sensor
Total Number of Pixels	2592(H) X 1944(V)
Resolution	5.0 MegaPixel
Frame Rate	15fps at 2592 x 1944 (NTSC) 15fps at 2592 x 1944 (PAL)
Triple Stream	Main Stream: 2592 x 1944 (5.0MP) Sub Stream: 1280 X 720 (720P)/ 640 X 480 (VGA)/ 320 X 240 (QVGA) Mobile Stream: 640 X 480 (VGA)/ 320 X 240 (QVGA)
Lens	5.0-50mm Motorized Lens
Min. Illumination	0.05LUX/ F1.2 (0 LUX IR On)
Shutter Control	NTSC/ PAL: 1/5 ~ 1/20,000sec
Day/Night	Built-in 4PCS High Power IR Array
IR Distance	80 Meters
SD Card Storage	YES (up to 128GB)
Network Protocol	TCP/ IP, HTTP, DHCP, DNS, DDNS, RTP/ RTSP, PPPoE, SMTP, NTP, UPnP, SNMP, HTTPS, FTP
Ethernet	1 x RJ45 10M/ 100M Ethernet Interface
Power	12V DC/ PoE IEEE 802.3af
PoE Power Consumption	0.2A (48V DC)/ 9.0W
Operating Temperature	-30°C ~ 60°C (-22°F ~ 140°F)
Operating Humidity	90% or Less (Non-Condensing)
Dimension	108mm(ø) X 301mm(L)
Weight	1.43 kgs

DIMENSION

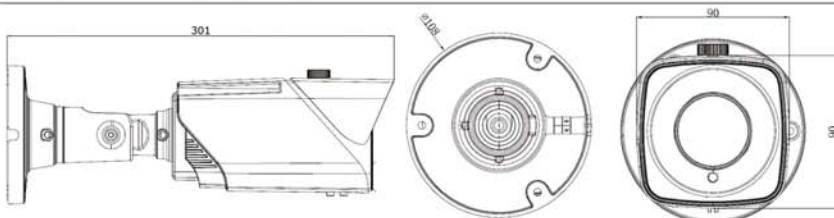

Unit : mm