

# EZ-IP753312IR800E(A) EZ-IP753312IR800FE(A)

H.265 4K/ 8.0MP IR BULLET IP CAMERA, 15FPS, POE

H.265 4K/ 8.0MP IR BULLET IP CAMERA, 30FPS, POE

## FEATURES


- **4K Ultra HD: 3840 x 2160 pixels/ 8.0 Megapixel**
- **ROI (Region of Interest): Record Areas Where Matter Most**
- **Intelligent Analysis/ IVS:**  
Cross Counting, Perimeter Intrusion Detection, Line Cross Detection, Stationary Object Detection, Pedestrian Detection
- **40pcs SMD IR LED/ 45M IR Distance**
- **Scheduling Record to SD Card (up to 128GB)**
- **External Jack for Audio I/ O, Alarm I/O, BNC, and Reset**
- **Motorized Lens for Zoom & Focus Remote Control (Optional)**
- **IP66 Weatherproof Rating**



## SPECIFICATION

MODEL	EZ-IP753312IR800E(A)	EZ-IP753312IR800FE(A)
Video Compression	H.265 / H.264 (Onvif 2.6)	
Image Sensor	1/2.5" SONY STARVIS IMX274	
Total Number of Pixels	3840(H) X 2160(V)	
Resolution	8.0 MegaPixel	
Frame Rate	15fps at 3840 x 2160 (NTSC) 15fps at 3840 x 2160 (PAL)	30fps at 3840 x 2160 (NTSC) 25fps at 3840 x 2160 (PAL)
Triple Stream	Main Stream: 3840 x 2160 (8.0MP) Sub Stream: 1920 X 1080 (max.) Mobile Stream: 640 X 480 (max.)	
Lens/ Viewing Angle	3.3-12mm Lens (114°~ 36°)/ 3.3-12mm Motorized Lens (114°~ 36°) Optional	
Min. Illumination	0.1LUX/F1.2 AGC On (0 LUX IR On)	
F Value	F1.4~2.8 ±5%	
Shutter Control	NTSC/ PAL: 1/5 ~ 1/20,000sec	
IR Distance	Built-in 40pcs SMD IR LED/ 45 Meters	
SD Card Storage	YES (up to 128GB)	
Network Protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/ RTSP, PPPoE, SMTP, NTP, UPnP, SNMP, HTTPS, FTP	
Ethernet	1 x RJ45 10M/ 100M Ethernet Interface	
Power	12V DC/ PoE IEEE 802.3af	
PoE Power Consumption	0.19A (48V DC)/ ~9W	
Operating Temperature	-30°C ~ 55°C (-22°F ~ 131°F)	
Operating Humidity	90% or Less (Non-Condensing)	
Dimension	242mm(L) X 88mm(W) X 91mm(H)	
Weight	0.88 kg	

## DIMENSION

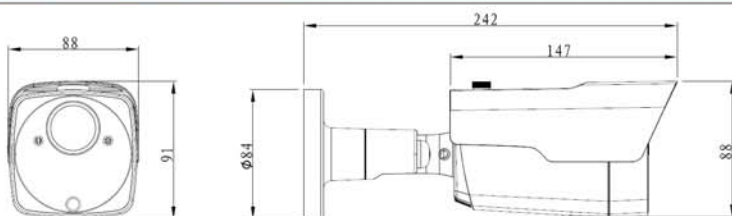

Unit : mm