


### 5.0MP HD Hybrid 50M IR Camera



\* OSD / UTC Support

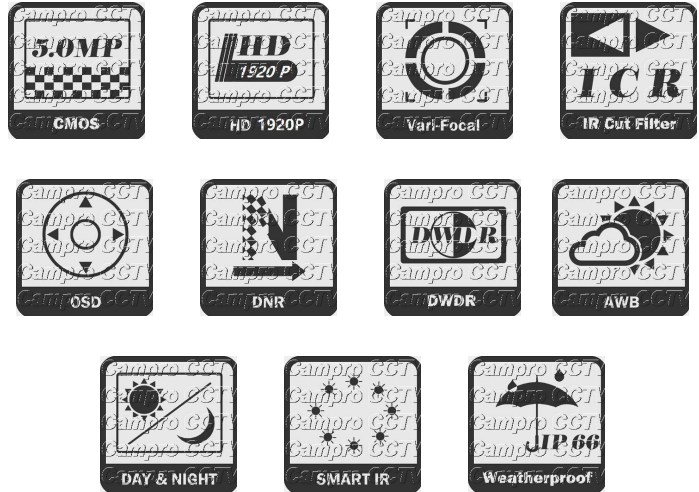

#### CB-WD500A

Pick Up Element	1/2.9" 6.82MP SONY IMX326
Picture Element	2560(H) x 1920(V)
Resolution	5MP: 2560 x 1920@20fps
Lens Type	2.8-12mm 5.0 Mega Pixel ICR Lens (Option: Motorized Lens & Auto Iris Lens)
Optical Filter	With IR-Cut Filter removable (ICR) Design
Sync. System	Internal
Scanning System	2 : 1 Interlace
Min. Illumination	Color: 0.01 Lux / B/W: 0.001 Lux / 0 Lux IR On (F2.0)
S/N Ratio	More Than 55dB (AGC OFF)
WDR	D-WDR On / Off
Day/Night Mode	Ext / Auto / Color / B&W
Electronic Shutter	Auto / Manual: 1/50(1/60) – 1/50,000sec.
White Balance	ATW / AWC-SET / Indoor / Outdoor / MWB
Gain Control	Adjustable Auto Gain Control
Backlight Compensation	N/A
DNR	2D DNR
Sharpness Adjustment	OFF / Auto
Brightness Adjustment	Adjustable Brightness
Transmission Distance	RG59 Coaxial Cable -300M / RG6U Coaxial Cable -500M
Twisted Cable Transmission Distance	Max. 300M
Video Output	AHD / CVI / TVI (1920P) & Analog Composite Video, Switchable
Operating Temp.	-10°C ~ 50°C / RH 85% or Less
Power Supply	DC 12V ± 10%
Weatherproof	IP66
Construction Coaxial Cable	Aluminum

<b>IR Distance / IR Led</b>	50M / 2 x 42 MIL Array IR LED
<b>IR Led Activation</b>	10 Lux
<b>Dimension</b>	210(L) x 110(W) x 95(H)mm
<b>Weight</b>	1300g
<b>Certification</b>	CE / FCC / RoHS