

EZ-IP5128IR200E(X)

EZ-IP5128IR500E(X)

H.265 2.0MP FLOOD LIGHT IR BULLET POE IP CAMERA

H.265 5.0MP FLOOD LIGHT IR BULLET POE IP CAMERA

FEATURES


- ONVIF 2.6 (H.264)
- PoE: Power over Ethernet
- 2pcs Flood Light + 2pcs IR Array + 1pc PIR
- Once PIR is triggered, flood lights turn on to warn the intruder.
- 7M PIR Distance
- 20M IR Distance; 10M Flood Light Distance
- Built-in Microphone and Speaker (Two-Way Audio)
- Scheduling Record to SD Card (up to 128GB)
- Weatherproof IP66
- Metal Housing to Withstand Years of Use



SPECIFICATION

MODEL	EZ-IP5128IR200E(X)	EZ-IP5128IR500E(X)
Video Compression	H.265 / H.264	
Image Sensor	1/2.7" High Image CMOS Sensor	
Total Number of Pixels	1920(H) X 1080(V)	2592(H) X 1944(V)
Resolution	2.0 MegaPixel	5.0 MegaPixel
Frame Rate	20fps at 1920 x 1080 (NTSC) 20fps at 1920 x 1080 (PAL)	15fps at 2592 x 1944 (NTSC) 15fps at 2592 x 1944 (PAL)
Dual Stream	Main Stream: 1920 X 1080 (2.0MP) Sub Stream: 640 X 480 (max.)	Main Stream: 2592 X 1944 (5.0MP) Sub Stream: 640 X 480 (max.)
Lens / F Value	2.8mm Lens/ F2.0	
Min. Illumination	0.05LUX/ F1.2 (0 LUX IR On)	
Shutter Control	NTSC/ PAL: 1/5 ~ 1/20,000sec	
Two- Way Audio	Built-in Microphone & Speaker	
IR LED	2pcs IR Array/ 20M IR Distance	
Flood Light	2pcs Flood Light/ 10M Distance	
PIR	1pc PIR/ 7M Distance	
Network Protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/ RTSP, PPPoE, SMTP, NTP, UPnP, SNMP, HTTPS, FTP	
Ethernet	1 x RJ45 10M/ 100M Ethernet Interface	
Power	12V DC/ PoE IEEE 802.3af	
PoE Power Consumption	0.1A (48V DC)/ 4.5W	
Operating Temperature	-20°C ~ 40°C (-4°F ~ 104°F)	
Operating Humidity	90% or Less (Non-Condensing)	
Dimension	69.8(Dia.) X 154.5mm(L)	
Weight	0.45 kg	

DIMENSION

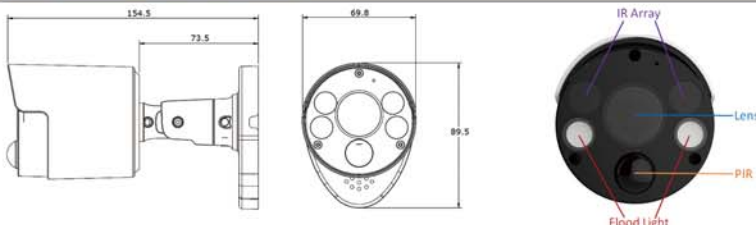

Unit : mm